



## *Equipment racks*


***Powering  
Tomorrow's  
Networks  
Today***

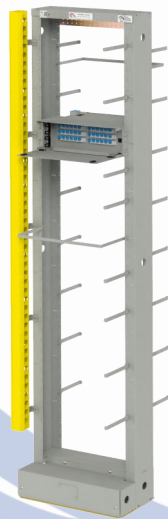


**PTS3504**

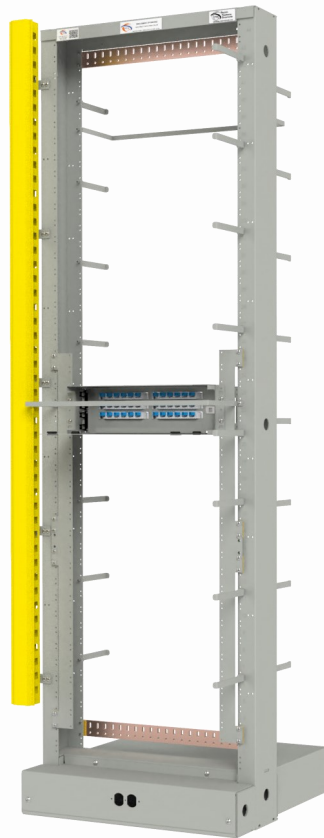


**PTS3701**

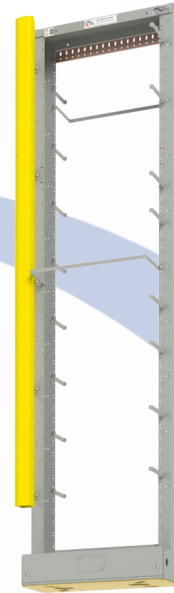

**PTS3503**

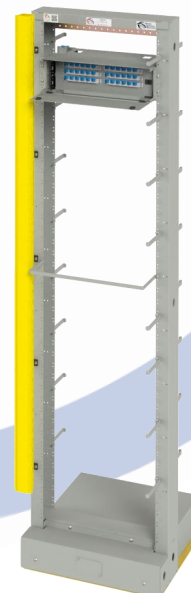

**PTS3502-WFT**

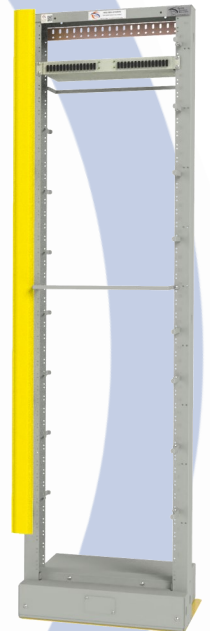


**PTS3502**



## 19" & 23" Equipment Racks


- 84" Tall Including Base; 43RU Hole Spacing
- Zone 4 Seismic Third Party Tested & Certified to 500 lbs/ PTS Simulation Certified to 900 lbs
- Fully Welded, Powder Coated Steel

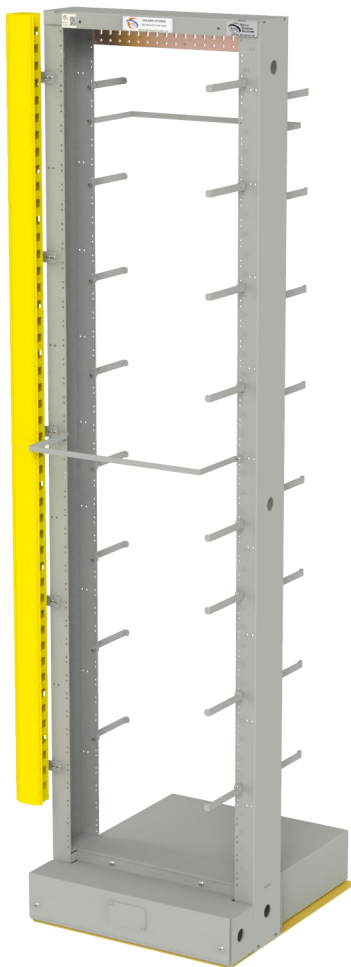

83.92" H x 21.88" W x 24.23" D

### 19" Comm Bay Rack

PTS3502

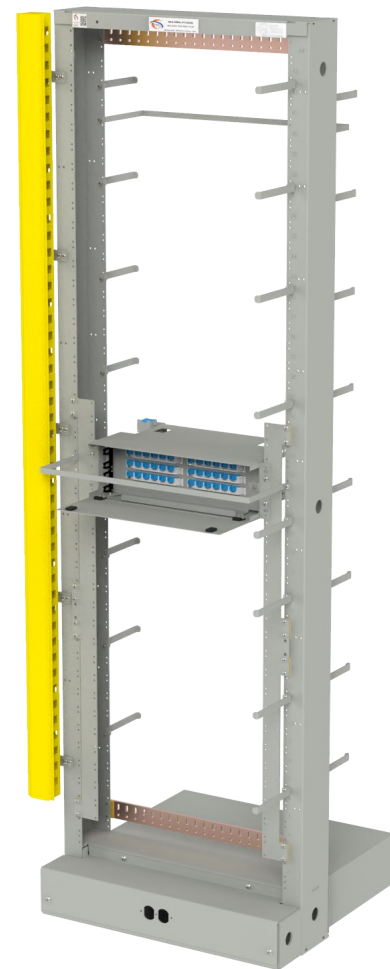


83.79" H x 25.88" W x 24.20" D

### 23" Hybrid Rack

PTS3701

### *Optional Components*


- 72" Vertical Fiber Guide
- Copper Bus Bar (2 in Hybrid Rack)
- Cable Tie Bars and Fingers
- Installation Hardware Kit for Zone 4
- Isolation Systems for Communication Equipment
- 15 x 15 Fuse Panel
- 72 Port Fiber Tray

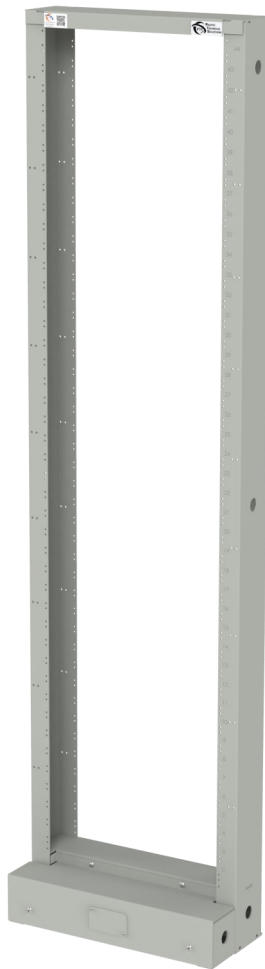


83.92" H x 21.88" W x 9.35" D

### **19" Heavy Duty Rack**

**Zone 4 Seismic Third Party  
Tested & Certified to 1000 lbs**

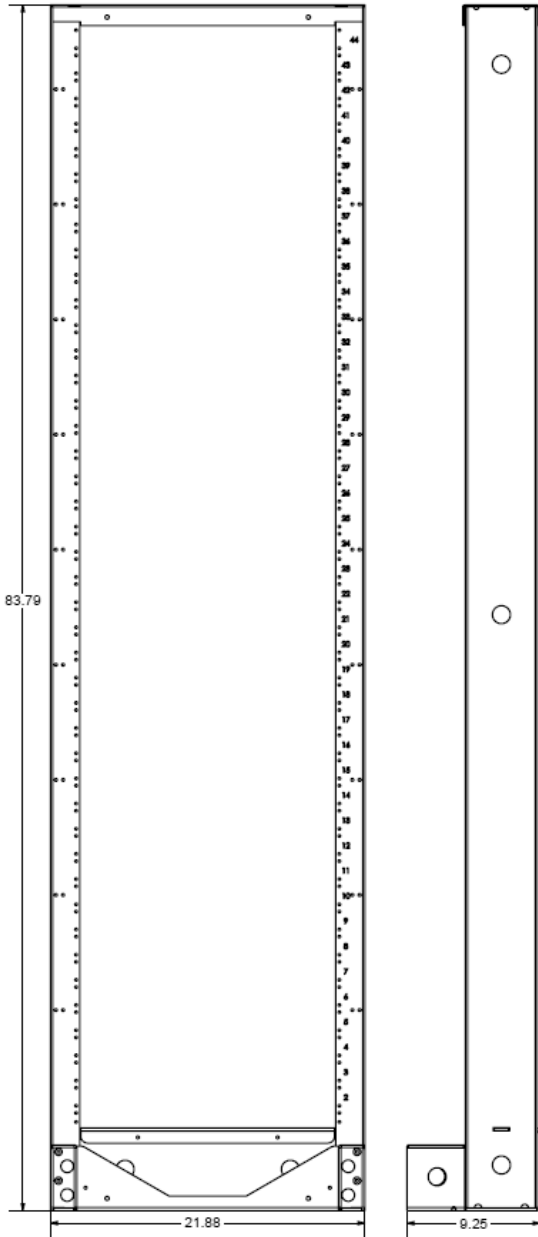

**PTS35XX**

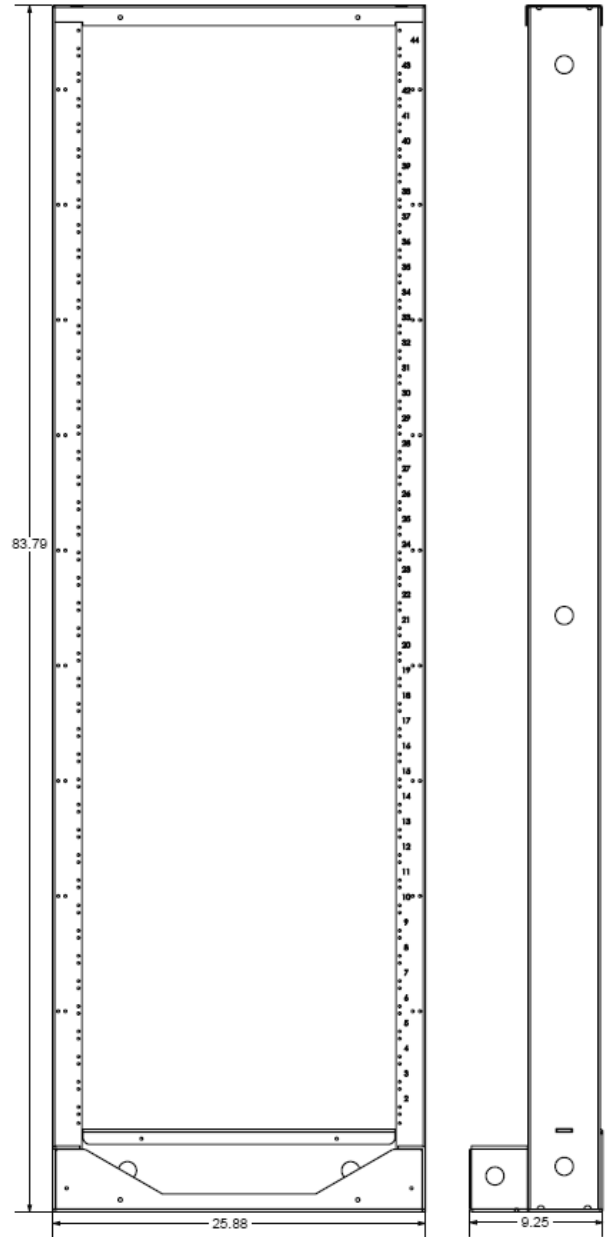

**PTS37XX**