


Fully Assembled Zone 4 Seismic Tested and Certified 23" Equipment Rack

- 7' Tall Including Base, 44 RU
- Hole Spacing in Accordance with IEC 60297-3-100 Type 1 and Threaded #12-24

Items Available for Full Assembly to Rack or in Install Kit per Customer Order

- Fiber Duct with Cover; 72" Single Yellow Section
- Fiber Panel (PTS3750); 72 Position (36 LC Duplex Connectors)
- 23 RU Isolated Rack Adapter; Mounting Conversion from 23" to 19"
- Various Cable Support Fingers and Bars
- Isolation Kit
- Rear Toe Kick
- Installation Kit with Mounting Hardware and Drilling Template

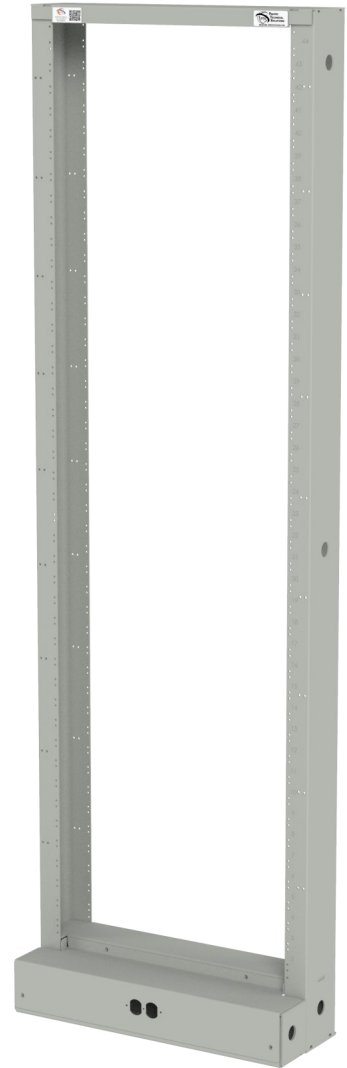


Specifications

Material	Powder Coated Steel
Color	Light Textured Gray
Dimensions (Base Rack)	83.92" H x 25.88" W x 9.25" D
Dimensions (with Rear Toe Kick)	83.92" H x 25.88" W x 24.23" D
Seismic Rating	Third Party Tested & Certified to 500lb / PTS Simulation Certified to 900lbs
Unit Weight	~125 to 135 lbs




Outline Drawings

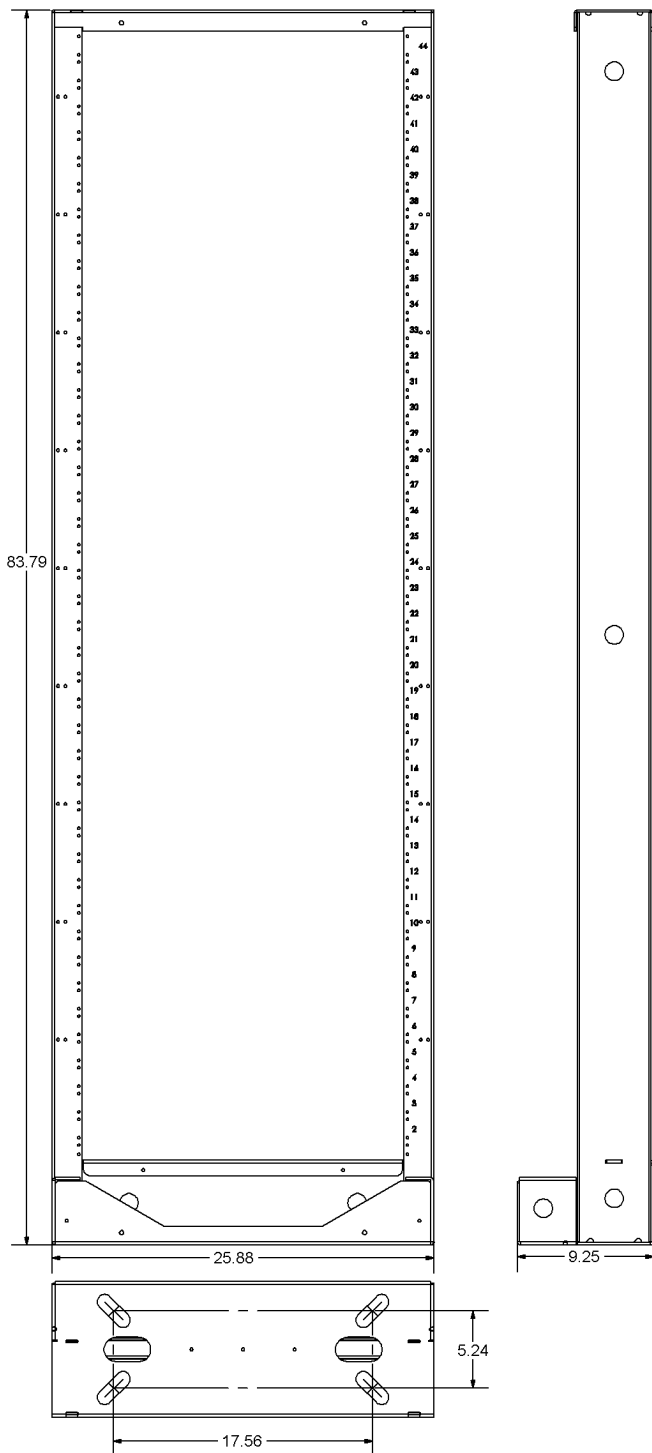

Accessories



PTS3757-A
23" GROUND BAR 1 RU




PTS3753
6" CABLE SUPPORT




PTS3754-6
6" X 23" CABLE SUPPORT



PTS3754-10
10" X 23" CABLE SUPPORT




PTS3756-23RU
23" TO 19" 23 RU KIT

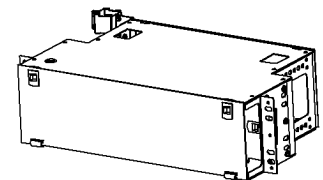

PTS3750-72LC
FIBER SHELF 36 PAIR



PTS3782
2" FIBER DUCT

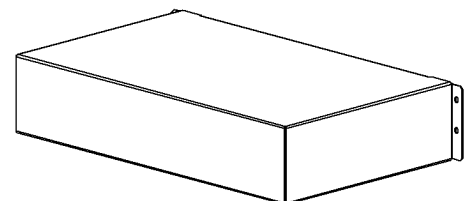

23" REAR TOE KICK

